

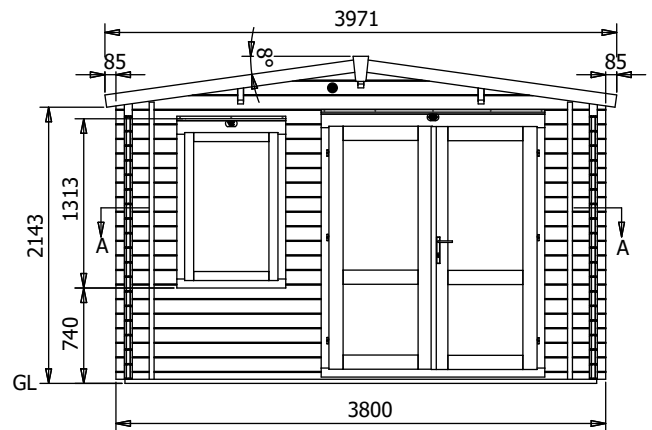


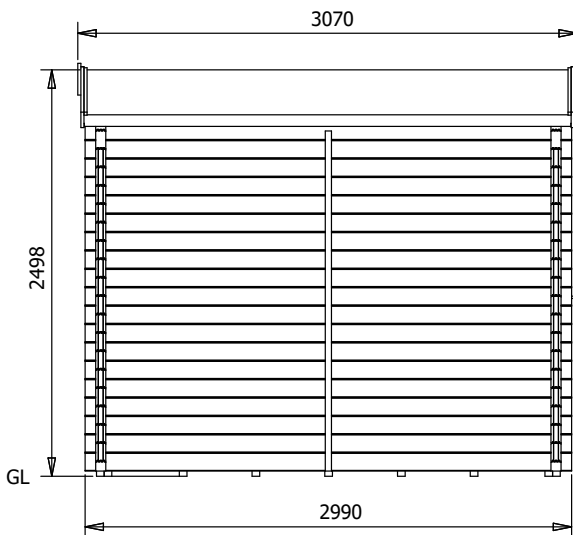

Rhine with uPVC INSULATED Log Cabin

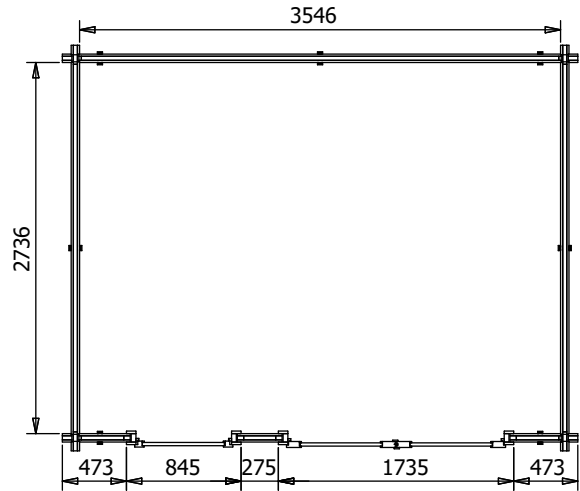

Specification

- Overall External Dimensions: 3.97m x 3.03m (13' 0" x 9' 11")
- External Width: 3.80m (12' 5")
- External Depth: 3.00m (9' 10")
- Ridge Height: 2.49m (8' 2")
- Internal Width: 3.55m (11' 7")
- Internal Depth: 2.74m (8' 11")
- Wall Thickness: 62mm
- Internal Eaves Height: 2.15m (7' 0")

Overall Wall Thickness: 62mm Insulated Log (equivalent to 140mm thick U-Value)

Walls: 100% Slow-Grown Spruce

Insulated Roof Thickness: 60mm. Comprising a sandwich of MR P5 board, insulation, and tongue and groove timber.

Insulated Floor Thickness: 50mm. Comprised of 30mm of insulation sandwiched between two 10mm MR P5 boards.

- Overall U-Value (W/m2k): 0.69 W/m2k
- Floor Bearers: Pressure Treated
- Door Height: 2.05m (6' 9")
- Door Width: 1.55m (5' 1")
- Window Opening Size: 1.08m x 0.66m
- Glazing Material: 28mm double glazed toughened glass
- Approx. Assembly Time: 2 Days*

*This is an approximate time only, based on 2 people. Assembly time may vary depending on season/weather conditions, foundation type, ability of those constructing, etc