
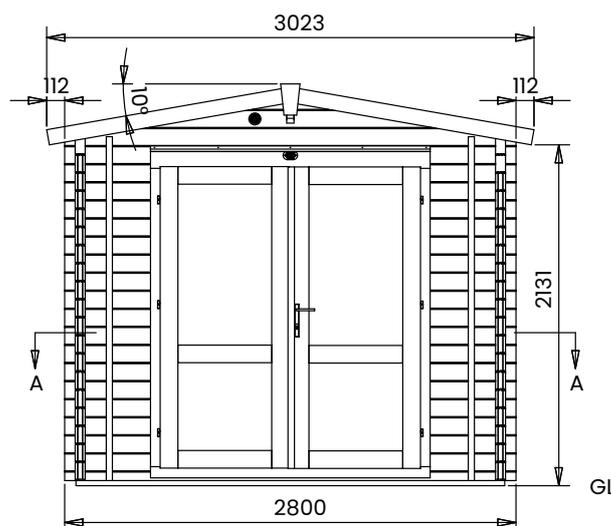
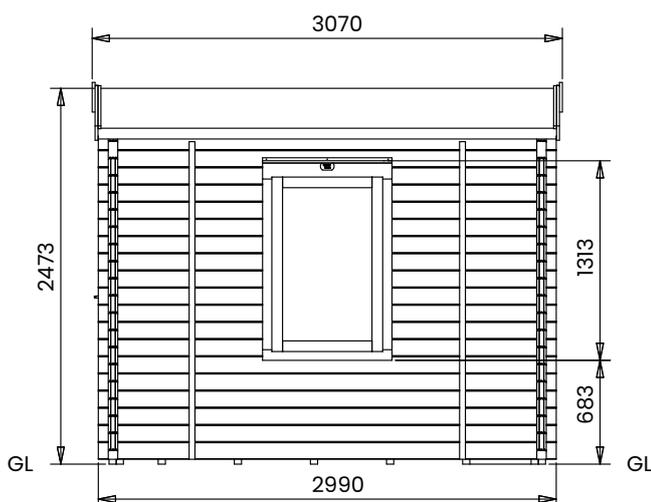


# Severn with uPVC INSULATED Log Cabin

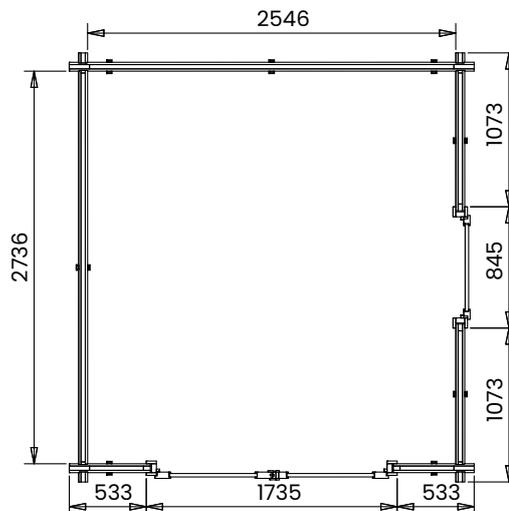

## Specification

- **Overall External Dimensions:** 3.02m x 3.03m (9' 11" x 9' 11.25")
- **External Width:** 2.80m (9' 2.2")
- **External Depth:** 3.00m (9' 10")
- **Ridge Height:** 2.49m (8.2")
- **Internal Width:** 2.55m (8' 4")
- **Internal Depth:** 2.74m (8' 11")
- **Internal Eaves Height:** 2.10m (6' 10")
- **Wall Thickness:** 62mm Insulated Log (equivalent to 140mm thick U-Value)
- **Walls:** 100% Slow-Grown Spruce
- **Purlin Thickness:** 45mm
- **Floor Bearers:** 32mm x 47mm
- **Floor Panel Thickness:** 50mm
- **Ventilation:** 2 Plastic Vents Included

- **Insulated Roof Thickness:** 60mm. Comprising a sandwich of MR P5 board, insulation, and tongue and groove timber.
- **Standard Roof Covering:** Polyester Reinforced Bitumen Felt Included
- **Roof Covering Upgrades:** Upgrade to our bitumen shingles, available in black and green rectangular or black hexagonal.
- **Insulated Floor Thickness:** 50mm. Comprised of 30mm of insulation sandwiched between two 10mm MR P5 boards.
- **Floor Bearers:** Fully Pressure Treated
- **Overall U-Value (W/m<sup>2</sup>K):** 0.69 W/m<sup>2</sup>K
- **Door Style:** uPVC Double Glazed French Doors
- **Door Locking System:** 12 Point Locking System
- **Glazing Material:** 28mm Double Glazed, Toughened Glass